


## FDB0216F FIBER OPTIC TERMINATION BOX

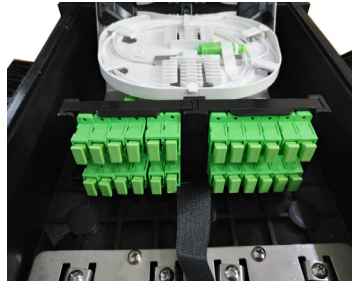

FTTH drop cable type fiber optic splice & splitter closure features with ruggedness, which is tested under harsh conditions and stand up to even the most severe conditions of moisture, vibration and extreme temperatures. Humanized design help user get better experience.

### FEATURE

- Feature
- Dis-mountable adaptor panel
- Support midspan termination
- Easy operation and installation
- Rotable and dis-mountable splice tray for easy splicing
- Outdoor wall mounting and pole mounting
- 2x3mm indoor ftth drop cable and outdoor figure 8 ftth drop cable

### APPLICATION

- Outdoor wall mounting, pole mounting, pipe-lined
- 2\*3.0mm indoor FTTH drop cable and outdoor figure 8 FTTH drop cable

### TECHNICAL SPECIFICATION

Model	FDB0216F		FDB0224F		FDB0224G
Dimension(mm)	385*245*130		385*245*155		385*245*130
Cable ports	1uncut port	2round ports	1uncut port	2round ports	1uncut port
Applicable cable diameter (mm)	10-17.5	8-17.5	10-17.5	8-17.5	10-17.5
Drop cable ports	16ports		24ports		24ports
Applicable cable	2*3mm ftth drop cable, 2*5mm figure 8 ftth drop cable				
Maximum Splicing	144/72 fibers (6 trays, 12/24 fibers/tray)				
Applicable Splitter	1x 1*16 (PLC) ; 2x (1*8 (PLC)				
Impact Test			IK10		
Pull-force			100N		
Mid-span Entry			yes		
Storage (Tube/Micro Cable)			yes		
Material	Modified polymer plastic				
Color	Black				
Net weight			4kgs		
Packaging	540*410*375mm (4pcs per carton)				

