

Terminal BOX Riser TLR-8H Fiber Access Terminal- 8 Cores

Description

FAT-8H fiber access termination box is able to hold up to 8 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTH network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.


Features

- Water-proof design with IP-65 protection level for outdoor.
- Integrated with 2 x splice trays and 8 x shutter type adapters.
- Fiber bend radius control more than 35mm.
- 2 x inlets for uncut cable with maximum diameter 12mm .
- 2 x covers structure to provide a better protection and neat cabling, unauthorized tampering is prevented.
- Each splice tray accommodates 8 x sleeves(60x1.0mm) and 2 x splitters(1:2,1:4 or 1:8) .
- Made by industrial PC+ABS plastic with UL94-V0 fire retardant feature, life span at least 20 years.
- 8 x outlets for 2x3mm flat type or 3-5mm round type drop cable.



Configuration

Material	Size	Max Capacity			Cable Entrance	Weight	Color
PC+ABS UL94-V0	A*B*C(mm) 210*125*50	Splice Trays 2pcs x 8FO	Fiber Adapters 8(SC) or 16(LC)	PLC Splitters 2pcs x 1:2,1:4 or 1:8	2 x Inlets (6-12mm) 8 x Outlets(3-5mm)	0.8kg	White

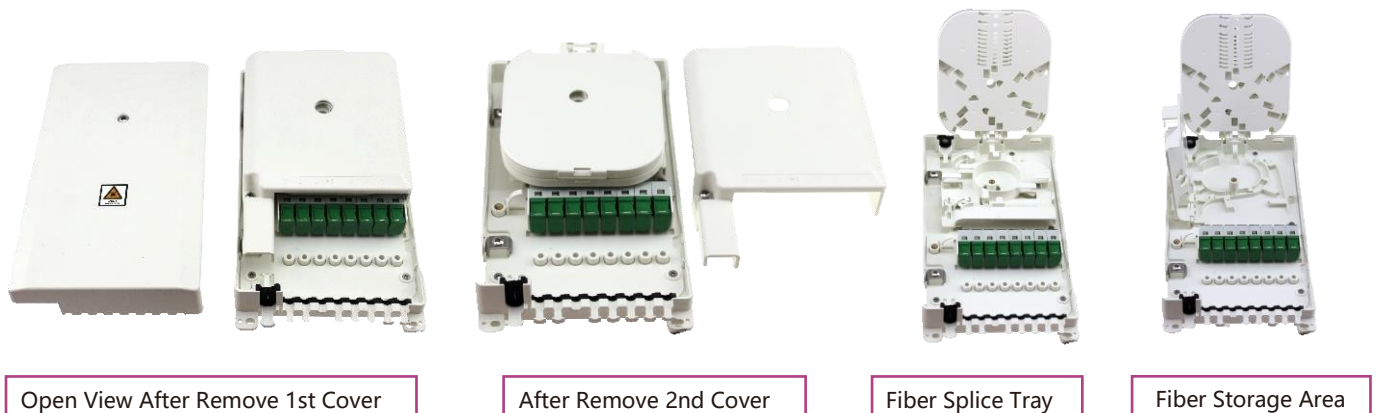

Open View After Remove 1st Cover

After Remove 2nd Cover

Fiber Splice Tray

Fiber Storage Area

Standard Accessories

Cable ties, fiber protective sleeves, wall mounted tapped screws, rubber grommets for cable inlets&outlets(pre-installed), manual instruction.

Optional Accessories

Pole mounted kits.