

# SUX711G-F360

## 1GE+CATV XPON ONU



High Speed CPU



Low Power Consumption




Software Customization



Optional Shell Supply

### Brief Views


SUX711G-F360 is an indoor fiber broadband access terminal. The device provides one GPON / EPON adaptive optical port and supports XPON mode. It can be used in connection with our company FD16 series GPON OLT or FD11 / 12 series EPON OLT. It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet and CATV services based on GPON and EPON technology.

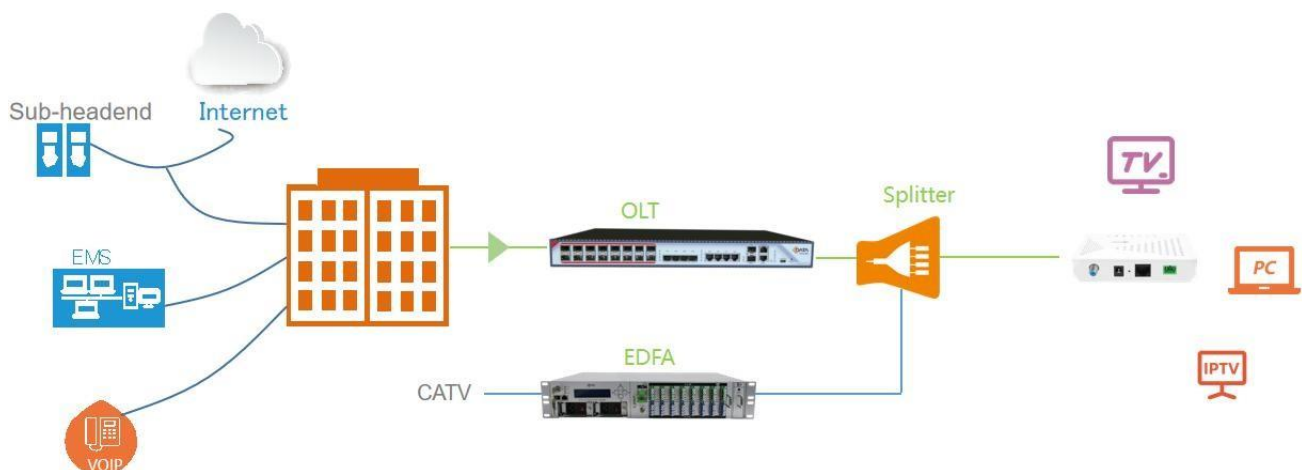

## Functional Feature

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support remote WEB/Telnet access control
- Support remote CATV port management

## Product Interface and LED

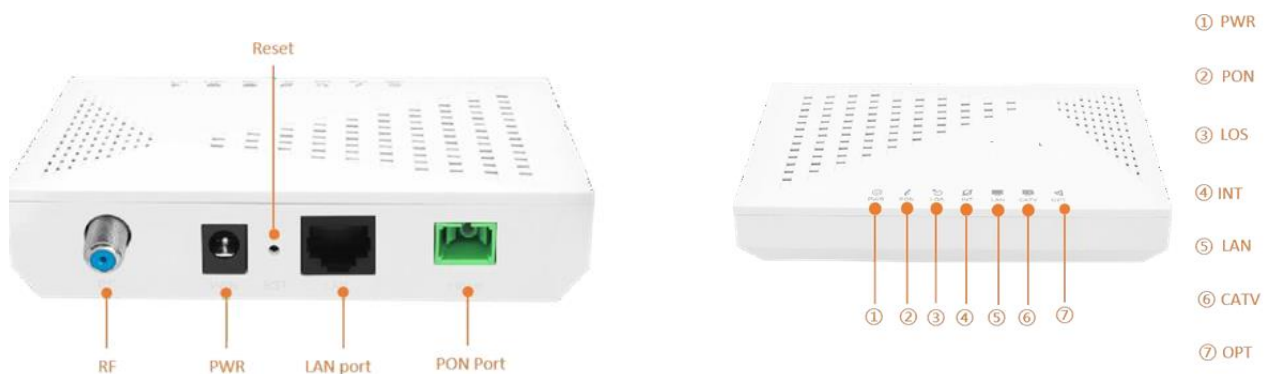

## LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
LAN	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.
CATV	CATV status	On: CATV optical normal Off:The CATV signals are not received
OPT	Light intensity indicator	On: Higher than ONU RX maximum threshold; Flashing: Lower than ONU RX minimum threshold; Off: ONU RX is within the normal threshold range.

## Product Specification

### Mechanics

Dimensions	125mm(L)*80mm(W)*30.5mm (H)
Weight	About 0.13kg

### Hardware

User Port (LAN)		RJ-45 connector
		1*10/100/1000Mbps adaptive Ethernet port
		Full/half duplex
		Auto MDI/MDI-X
Indicators		PWR / PON / LOS / LAN / INT / CATV / OPT
PON Port	PON Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+
	PON Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream
	Wavelength	Transmit: 1310nm      Receiver: 1490nm
	Receiving sensitivity	EPON: -27dBm      GPON: -28dBm
	Saturated power	EPON: -3dBm      GPON: -8dBm

	Transmitting power	EPON:0~4dBm    GPON: 0.5~5dBm
--	--------------------	-------------------------------

<b>CATV (Input /Output port)</b>	
Wavelength: 1550nm	
Input optical power: -18dBm~0dBm(with AGC)	
RF frequency: 47MHz~1000MHz	
RF output level: 78dBuV (@-12~-2dBm@85MHz) (with AGC)	
RF output return loss: >12dB(with AGC)	
RF impedance: 75 Ω	

<b>Environment</b>	
Working temperature	0 to 40° C
Operating humidity	10% ~ 90% (Non-condensing)

<b>Power</b>	
External 12VDC/0.5A power supply adapter	
Power consumption	≤3.5W